

COEX™ C3000 Thermal IP PTZ Camera Station

The COEX™ C3000 Thermal IP PTZ Camera Station has a unique compact and lightweight design developed specifically for hazardous-area applications. C3000 camera stations are designed for both toughness and durability as demanded for operation in the most adverse of environments, while allowing constant visual feedback in zero-light conditions.



COEX C3000 hazardous-area camera stations operate in the most extreme environments worldwide. Designed for toughness, durability, and certified to perform in ambient temperatures from -55°C to +70°C without compromise, they are ideal for oil and gas, marine, and industrial installations.

This premium-performance camera station delivers superb thermal imaging in all lighting conditions and across long distances.

Featuring the latest encoding technology (2nd generation IP encoder), the camera station is capable of triple-stream H.264 and H.265 encoding for simultaneous live view and recording.


Utilizing the advanced radiometry feature, the camera station can provide real-time temperature data and differential temperature monitoring of critical devices and applications.

The C3000 Thermal IP PTZ Camera Station has cybersecurity measures built-in, including encrypted video streaming, HTTPS, and 802.1x protocols.

This camera station is compatible with a variety of VMS platforms through ONVIF Profile S and T compliance.

Options

- Continuous rotation
- Advanced radiometry

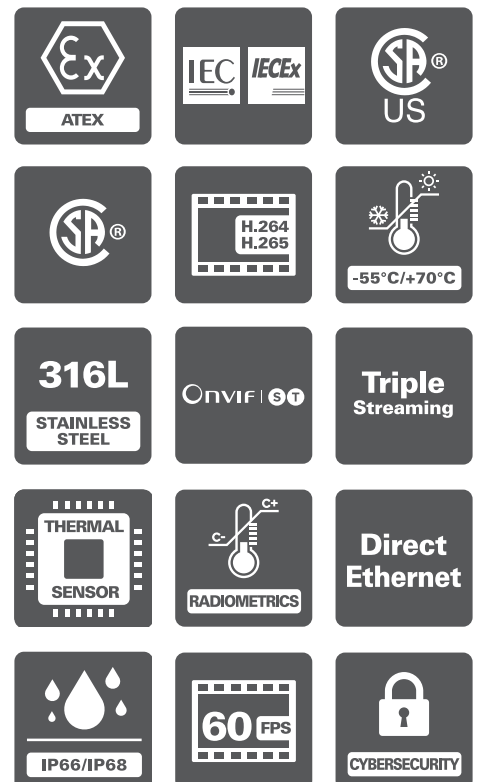

Specifications

CERTIFICATIONS / RATINGS*6		[OPTIONS]
ATEX / IECEx / UKCA	ATEX II 2GD, Ex db IIB/IIC Gb; Ex tb IIIC Db; T4 / T5 / T6 EN60079-0, EN60079-1, EN60079-28, EN60079-31, IEC60079-0, IEC60079-1, IEC60079-28, IEC60079-31	
ATEX / IECEx / UKCA Certified Temperature	-55°C to 40°C (T6), +50/60°C (T5), +70°C (T4)	
CSAus Class / Division	Class I, Div 1, Groups A, B, C, D; Class II, Div I, Groups E, F, G; T4 / T5 / T6	
CSAus Class / Zone	Class I, Zone 1, AEx db IIC Gb; Zone 21, AEx tb IIIC Db; T4 / T5 / T6	
CSAus Standards	FM3600, FM3615, FM3616, UL50, UL50E, UL62368-1 UL60079-0, UL60079-1, UL60079-31	
CSAus Certified Temperature	-55°C to +40°C (T6), +50/55/60°C (T5), +70°C (T4)	
CSA Class / Division	Ex db IIC Gb; Ex tb IIIC Db; Class II, Div 1, Groups E, F, G, Class III, Div 1; T4 / T5 / T6	
CSA Standards	C22.2 No. 0, C22.2 No. 60079-0, C22.2 No. 60079-1 C22.2 No. 60079-31, C22.2 No. 62368-1, IEC60529 C22.2 No. 94.1, C22.2 No. 94.2	
CSA Certified Temperature	-55°C to +40°C (T6), +50/60°C (T5), +70°C (T4)	
EMC	EN61000-6-2, EN 61000-6-4, Class A limits	
EMC (US & Can.)	FCC CFR47 Part 15 Class A ICES-003 Class A	
CE / UKCA	IEC62368-1, IEC60825-1	
DNV	TAA00001M2	
INMETRO	BRA 21.GE0018X	
C-TICK	On Request	
ENVIRONMENTAL		
Operating Temperature	-45°C to +70°C / -49°F to +158°F	
Storage Temperature	-45°C to +80°C / -49°F to +176°F	
Ingress Protection	IP66 & IP68 (30m Submersion for 4 hrs) to IEC60529, Type 6 Enclosure	
Salt Mist	IEC60068-2-52 & IEC60945 Section 8.12	
Vibration	0.7 g to IEC60068-2-6 & IEC60945	
Wind Loading	Operational to 130 km/h, survival to 268 km/h	
MECHANICAL		
Material	Electro-polished 316L stainless steel	
Window	Germanium window with DLC (Diamond-Like Carbon) coating and impact guard	
Pan Turning Circle	Ø 560 mm / 22.05"	
Tilt Turning Circle	Ø 360 mm / 14.17"	
Mounting Orientation	Upright or inverted	
Mounting Base	4 x M8 tapped holes, equispaced on a 4" (101.6 mm) P.C.D.	
Dimensions*1 (W x D x H)	375 x 310 x 352 mm / 14.76" x 12.21" x 13.86"	
Weight*1	27 kg / 59.5 lbs	
Cable Gland Entries	2 x M20	
ELECTRICAL		
Power Requirements	24 V AC/DC (±10%) 50/60 Hz	
Power Consumption*1	9 VA Quiescent 68 VA Operating 100 VA Max	
Auxiliary Inputs*2	1 x contact closure input (5 V pull up) [additional inputs available on request]	
Relay Outputs*2	1 x volt free switched output (24 V 0.75 A max) [up to 2 available on request]	
Audio*2	[Line Input]	
CAMERA OPERATION		
	362° Rotation	Continuous Rotation
Pan Operation	0° to 42°/sec, mechanical limits, programmable soft-stops, preset positioning	0° to 42°/sec, programmable soft-stops, preset positioning
Tilt Operation	180° rotation, 0° to 21°/sec, mechanical limits, programmable soft stops, preset positioning	
Preset Functions	128 user programmable preset positions (pan, tilt digital zoom), preset accuracy <0.05°, absolute positioning	
ONVIF Control Features	PTZ control (continuous, relative and absolute) Preset store/recall, alarm inputs, and relay outputs	

THERMAL IMAGER	T315	T345	T625	T650
Image Sensor	Uncooled LWIR VOx microbolometer			
Pixel Pitch	17 μ m			
Thermal Sensitivity	<50 mK at f/1.0			
Spectral Response	7.5- 13.5 μ m			
Refresh Rate	75 Hz / 8.3 Hz [25 Hz / 30 Hz]			
Pixel Resolution	336 x 256		640 x 512	
Fixed Focal Length	9 mm f/1.25	25 mm f/1.1	25 mm f/1.1	50 mm f/1.2
Angle of View	35° x 27°	13° x 10°	25° x 20°	12.4° x 9.9°
Depth of Field	1.1 m	11 m	11 m	36 m
Hyperfocal Distance	2.1 m	21 m	21 m	71 m
Features	Continuous digital zoom, auto/manual gain mode (AGC), auto/manual FFC(NUC), selectable color palettes, polarity, second generation digital detail enhancement (DDE), image optimization, active contrast enhancement (ACE), information based histogram equalization (IBHEQ), smart scene optimization (SSO)			
Human Detection ^{*3/4}	~285 m	~930 m	~930 m	~1700 m
VIDEO ENCODING				
Compression Standards	H.264 (MPEG4 part 10/AVC) high, main, base profiles H.265 (MPEG-H part 2/HEVC), MJPEG			
Bitrate Mode	Constant Bitrate (CBR), Variable Bitrate (VBR)			
Encoding Capability	Up to 3 independently configurable encoded video streams			
Stream Bitrate ^{*5}	100 kb/s to 25 Mb/s			
Image Resolution ^{*5}	Native (640 x 512, 336 x 256), D1 (720 x 576/480), VGA (640 x 480), QVGA (320 x 240)			
Image Rate ^{*5}	Full, half, quarter, sixth			
GOP Structure	I-frame only, 5 to 240 frames			
Region of Interest (ROI)	Configurable per encoded video stream, ability to crop a selected area of the image source for encoding (variable resolution and aspect ratio)			
AUDIO ENCODING				
Compression Standards	ARM AACLC, ARM AACLC MPEG2, ARM AACHE, ARM AACHE V2			
Sample Rate	48 kHz, 44.1 kHz, 32 kHz, 16 kHz			
Stream Bitrate	12 to 384 kb/s (AACHE and AACHE V2 32 to 64 kb/s)			
NETWORK DEVICE				
Interface Options	Ethernet (100Base-T, 10-Base-T), Auto/full/half duplex, Auto/10/100, Configurable MTU Size			
Protocols	TCP/IP, UDP, ICMP, DHCP, DNS, HTTP, HTTPS, NTP, RTSP/RTP/RTCP, TSRTSP, RTMP, RTMPS, SRT, IGMP, SNMP, SYNS, SSL, TLS, 802.1x (EAP)			
Control Protocol	SYNS, ONVIF (Profile S, T compliant)			
Video Stream Delivery	RTSP/RTP (Unicast: UDP/TCP, Multicast UDP), TSRTSP, RTMP, RTMPS, SRT			
Network Discovery	SYNS, WS-Discovery (ONVIF)			
Device Security	Multiple users and 7 access levels protecting access to the web interface, ONVIF and RTSP services, HTTPS support, HTTP disable, 802.1x (EAP), video streaming disabled until change of default password, unicast stream disable			
Supported Internet Browsers	Chrome/Firefox/IE/Edge (No Active-X browser components required)			
System Maintenance	Field upgradeable firmware, diagnostic logs Hardware system supervisor providing temperature management, cold-start, auto-shutdown and watchdog control			

NOTE: *1 Dependent on certification and equipment fitted. *2 Dependent on cable tail option. *3 Based on Johnson criteria and best conditions. *4 Human detection values shown are nominal values and should be used as estimates only. Exact human detection calculations depend on a wide variety of environmental conditions, video encoding parameters and type of monitor or display used. *5 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream. *6 Exact certification requirements must be specified at the time of order.

PART CODE STRUCTURE

C3 - A B C D - E - F G H J

(Example) C3 - 1 V [] T315 - [] - E 1 E X

A - CAMERA HOUSING SIZE

1 Size 1 camera housing

B - FIXED/PTZ

C PTZ - Continuous pan

V PTZ - Non-continuous pan

C - DAY/NIGHT CAMERA

N/A

D - THERMAL IMAGING MODULE

T315 Medium resolution, 35° HFOV

T345 Medium resolution, 13° HFOV

T625 High resolution, 25° HFOV

T650 High resolution, 12° HFOV

E - WIPER

N/A

J - SPECIAL

Standard build

X Special build

H - OUTPUT TRANSMISSION TYPE

E Ethernet Base-T

G - BASE/MOUNTING TYPE

1 Standard PTZ mounting

F - TECHNOLOGY SERIES

E 2nd Gen, IP encoder

Synectics

sales@synecticsglobal.com

synecticsglobal.com

Specifications subject to change. E & OE.
Copyright © Synectic Systems Group Limited 2021. All Rights Reserved.

MANUFACTURER OF



CAMERA STATIONS

Reference Number:
06DS 0538 Iss 3