


# COEX™ C3000 Thermal IP Fixed Camera Station with Integrated Junction Box

The COEX™ C3000 Thermal IP Fixed Camera Station with Integrated Junction Box has been developed specifically for hazardous-area applications. C3000 camera stations are designed for both toughness and durability as demanded for operation in the most adverse of environments, while allowing constant visual feedback in zero-light conditions.

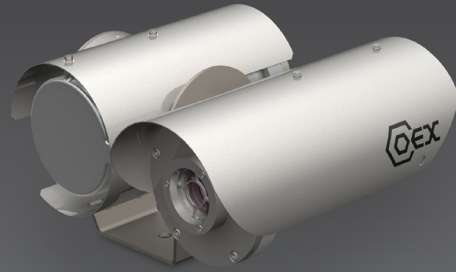

COEX C3000 hazardous-area camera stations operate in the most extreme environments worldwide. Designed for toughness, durability, and certified to perform in ambient temperatures from -55°C to +70°C without compromise, they are ideal for oil and gas, marine, and industrial installations.

This premium-performance camera station delivers superb thermal imaging in all lighting conditions and across long distances.

Featuring the latest encoding technology (3<sup>rd</sup> generation IP encoder), the camera station is capable of triple-stream H.264 and H.265 encoding for simultaneous live view and recording.

Utilising the advanced radiometry feature, the camera station can provide real-time temperature data and differential temperature monitoring of critical devices and applications.


The C3000 Thermal IP Fixed Camera Station with Integrated Junction Box has cybersecurity measures built-in, including encrypted video streaming, HTTPS, and 802.1x protocols.

Providing the capability for the direct entry and termination of field cables, the self-contained junction box also accommodates the management of fibre optic cores, power supply, and optional media converters for signal transmission.

This camera station is a versatile option for pre-existing systems, ensures a straightforward installation process, and is compatible with a variety of VMS platforms through ONVIF Profile S and T compliance.

### Options

- Advanced radiometry<sup>7</sup>
- Integral fibre optic transmission
- Various voltage options 24 V AC/DC and (100 to 240) V AC
- Media converter (Coax)

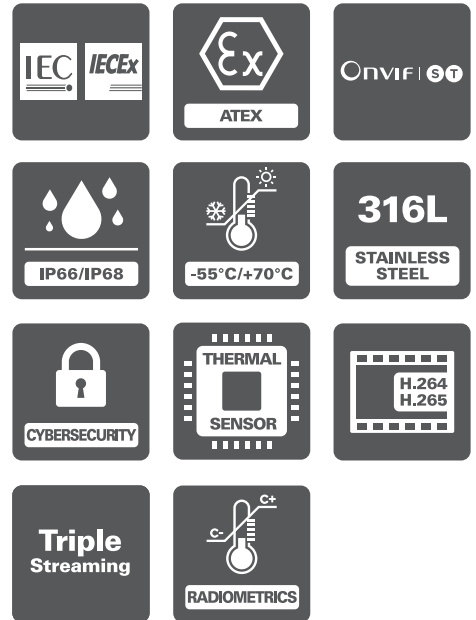

# Specifications

CERTIFICATIONS / RATINGS <sup>5</sup>		[OPTIONS]		
ATEX / IECEx / UKCA	ATEX II 2GD, Ex db IIB/IIC Gb; Ex tb IIIC Db; T4 / T5 / T6 EN60079-0, EN60079-1, EN60079-31, IEC60079-0, IEC60079-1, IEC60079-31			
ATEX / IECEx / UKCA Certified Temperature	-55°C to +50°C (T6), +60°C (T5), +70°C (T4)			
CE / UKCA	IEC62368-1, IEC60825-1			
DNV	TAA00001M2			
INMETRO	BRA 24.GE0010X			
ENVIRONMENTAL				
Operating Temperature	-45°C to +70°C / -49°F to +158°F			
Storage Temperature	-45°C to +80°C / -49°F to +176°F			
Ingress Protection	IP66 & IP68 (30m Submersion for 4 hrs) to IEC60529 Type 6 Enclosure			
Salt Mist	IEC60068-2-52 & IEC60945 Section 8.12			
Vibration	0.7 g to IEC60068-2-6 & IEC60945			
Wind Loading	Operational to 130 km/h, survival to 268 km/h			
Humidity	5% to 95%			
MECHANICAL				
Material	Electro-polished 316L stainless steel			
Window	Germanium window with DLC (Diamond-Like Carbon) coating and impact guard			
Mounting Orientation	Upright or inverted			
Mounting Base	1 x Ø 12 mm / 0.47" hole on mounting base			
Dimensions <sup>*1</sup> (W x D x H)	348 x 310 x 219 mm / 13.70" x 12.21" x 8.62"			
Weight <sup>*1</sup>	17 kg / 37.5 lb			
Cable Gland Entries <sup>*2</sup>	3 x M20 / [3 x M25] / [3 x 1/2" NPT]			
ELECTRICAL				
	Integrated PSU	[Without Integrated PSU]		
Input Power Options	(100 to 240) V AC 50 / 60 Hz	24 V AC 50 / 60 Hz or 24 V DC (±10%)		
Power Rating	1.5 A max @ 100 V (Inrush 30 A max)	-		
Power Consumption <sup>*1</sup>	40 VA Quiescent 40 VA Operating 115 VA Max	8 VA Quiescent 27 VA Max		
Auxiliary Inputs <sup>*2</sup>	1 x contact closure input (5 V pull up) [additional inputs available on request]			
Relay Outputs <sup>*2</sup>	1 x volt free switched output (24 V 0.75 A max) [up to 2 available on request]			
Audio <sup>*2</sup>	[Line Input]			
CAMERA OPERATION				
Preset Memory	128 user programmable preset positions (digital zoom)			
ONVIF Control Features	Digital zoom control, preset store/recall, alarm inputs, and relay outputs			
THERMAL IMAGER	T306	T318	T618	T636
Image Sensor	Uncooled LWIR VOx microbolometer			
Pixel Pitch	12 µm			
Thermal Sensitivity	<50 mK at f/1.0			
Spectral Response	8 - 14 µm			
Refresh Rate	<9Hz [<60Hz] [25 Hz / 30 Hz]			
Pixel Resolution	320 x 256			640 x 512
Fixed Focal Length	6.3 mm f/1.0	18 mm f/1.0	18 mm f/1.0	36 mm f/1.0
Angle of View	34.1° x 27.3°	12.7° x 9.7°	24.3° x 19.5°	12.2° x 9.8°
Features	8x digital zoom, auto/manual gain mode (AGC), auto/manual FFC(NUC), selectable colour palettes, second generation digital detail enhancement (DDE), image optimisation, active contrast enhancement (ACE), information based histogram equalisation (IBHEQ)			
Advanced Radiometry <sup>*7</sup>	When used with Synergy, the advanced radiometry feature provides four regions of interest per preset position that can be individually monitored or compared against one another for temperature threshold changes.			

VIDEO ENCODING	
Compression Standards	H.264 (MPEG4 part 10/AVC) high, main, base profiles H.265 (MPEG-H part 2/HEVC), MJPEG
Bitrate Mode	Constant Bitrate (CBR), Variable Bitrate (VBR)
Encoding Capability	Up to 3 independently configurable encoded video streams
Stream Bitrate*4	100 kb/s to 25 Mb/s
Image Resolution*4	Native (640x512 or 320x256), D1 (720 x 576/480), VGA (640 x 480), QVGA (320 x 240)
Image Rate*4	Full, half, quarter, sixth
GOP Structure	I-frame only, 5 to 240 frames
Region of Interest (ROI)	Configurable per encoded video stream, ability to crop a selected area of the image source for encoding (variable resolution and aspect ratio)

AUDIO ENCODING	
Compression Standards	ARM AACLC, ARM AACLC MPEG2, ARM AACHE, ARM AACHE V2
Sample Rate	48 kHz, 44.1 kHz, 32 kHz, 16 kHz
Stream Bitrate	12 to 384 kb/s (AACHE and AACHE V2 32 to 64 kb/s)

NETWORK DEVICE	
Interface Options*2/4	Ethernet (100Base-T, 10-Base-T), Auto/full/half duplex, Auto/10/100, Configurable MTU Size [Fibre optic SFP connectivity] [Media converter]
Protocols	TCP/IP, UDP, ICMP, DHCP, DNS, HTTP, HTTPS, NTP, RTSP/RTP/RTCP, TSRT, RTMP, RTMPS, SRT, IGMP, SNMP, SYNS, SSL, TLS, 802.1x (EAP)
Control Protocol	SYNS, ONVIF (Profile S, T compliant)
Video Stream Delivery	RTSP/RTP (Unicast: UDP/TCP, Multicast UDP), TSRT, RTMP, RTMPS, SRT
Network Discovery	SYNS, WS-Discovery (ONVIF)
Device Security	Multiple users and 7 access levels protecting access to the web interface, ONVIF and RTSP services, HTTPS support, HTTP disable, 802.1x (EAP), video streaming disabled until change of default password, unicast stream disable
Supported Internet Browsers*6	Chrome/Firefox/Edge (No Active-X browser components required)
System Maintenance	Field upgradeable firmware, diagnostic logs Hardware system supervisor providing temperature management, cold-start, auto-shutdown and watchdog control

[FIBRE OPTICS]*3	100FxLP	100Fx/20km	100Fx/30km	100WLFxA	1000Lx	1000WLxA
Optical Interface	100Base-Fx	100Base-Fx	100Base-Fx	100Base-Fx	1000Base-Lx	1000Base-Lx
Fibres Required	Dual	Dual	Dual	Single	Dual	Single
Wavelength	1310 nm	1310 nm	1310nm	Tx 1310 nm Rx 1550 nm	1310 nm	Tx 1310 nm Rx 1550 nm
Transmit Optical Power	(-20 to -10) dBm	(-15 to -8) dBm	(-5 to 0) dBm	(-14 to -8) dBm	(-9 to -3) dBm	(-9 to -3) dBm
Receive Sensitivity	< -31 dBm	< -31 dBm	< -31 dBm	< -33 dBm	< -22 dBm	< -22 dBm
Standard Optical Link Budget	> 11 db	> 16 db	> 26dB	> 19 db	> 13 db	> 13 db
Optical Connector	LC	LC	LC	SC	LC	SC
Fibre Management	Integral fibre management with termination capacity for spare fibre cores					
Features	[Link loss forwarding, fault detection]			Link loss forwarding, fault detection		

[MEDIA CONVERTER]*3	Ethernet over Coax
Connectivity	Auto-optimising for 75 Ω coaxial cable: 280m (920ft) full-rate over video-grade RG-59 (Up to 350m depending on cable quality) 350m (1150ft) full-rate over RG-6 500m (1640ft) full-rate over RG-11
Interface Data Rate	Auto-configuring for speed (10BASE-T or 100BASE-T) and duplex
Features	Retrofit existing analogue CCTV installations to Ethernet-based systems, allow the connectivity of camera stations outside the permitted run length of 100Base-Tx Ethernet cabling

NOTE: \*1 Dependent on certification and equipment fitted. \*2 Dependent on cable tail option. \*3 Exact interface option and media type must be specified at the time of order. Maximum transmission distance dependent on cable infrastructure quality and integrity. \*4 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream. \*5 Exact certification requirements must be specified at the time of order. \*6 Other browsers may be compatible but not tested. \*7 Advanced Radiometrics Service Pack 1. Advanced Radiometrics Service Pack 2 with added bonus features to follow.

## PART CODE STRUCTURE

C3 - A B C D - E - F G H J

(Example) C3 - 1 F T306 - B 3 E X

### A - CAMERA HOUSING SIZE

1 Size 1 camera housing

### B - FIXED/PTZ

F Fixed

### C - DAY/NIGHT CAMERA

N/A

### D-THERMAL IMAGING MODULE

T306 Medium resolution, 35° HFOV  
 T318 Medium resolution, 13° HFOV  
 T618 High resolution, 25° HFOV  
 T636 High resolution, 12° HFOV

### E - WIPER

N/A

### J - SPECIAL

Standard build  
 X Special build

### H - OUTPUT TRANSMISSION TYPE

C Coax  
 E Ethernet Base-T  
 S Singlemode fibre  
 M Multimode fibre

### G - BASE/MOUNTING TYPE

3 Base type 3 (with PSU)  
 4 Base type 4 (without PSU)

### F - TECHNOLOGY SERIES

B 3rd Gen, IP encoder