COEX[™] C2000 HD IP TriMode PTZ Camera Station

The COEX[™] C2000 HD IP TriMode PTZ Camera Station has a unique compact and lightweight design developed specifically to meet the worldwide demand for surveillance and process monitoring of harsh industrial and marine environments, providing unprecedented visual feedback in all lighting conditions.

The COEX C2000 marine camera stations are manufactured from the highest-grade, corrosion-resistant, electro-polished 316L stainless steel. They are designed for toughness and durability to operate in the most adverse environments, from freezing temperatures to the blistering heat of desert conditions.

This premium-performance camera station combines Full HD (1080p) video with 30x optical zoom and the latest thermal imaging technology, providing comprehensive coverage of a wide range of specific site applications where the benefits of using visible and thermal imaging are required.


Featuring the latest encoding technology (3rd generation IP encoder), the camera station is capable of quad-stream H.264 and H.265 encoding for simultaneous live view and recording. Utilizing the advanced radiometry feature, the camera station can provide real-time temperature data and differential temperature monitoring of critical devices and applications.

The C2000 HD IPTriMode PTZ Camera Station has cybersecurity measures built-in, including encrypted video streaming, HTTPS, and 802.1x protocols.

This camera station is compatible with a variety of VIMS platforms through ONVIF Profile S and T compliance.

Options

- Integral wiper
- COEX MEWS5 wash systems
- Advanced radiometry
- Continuous rotation

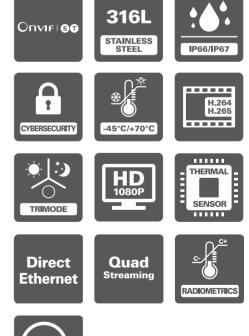





Specifications


CERTIFICATIONS / RATING	GS*⁵ [opt	IONS]			
EMC	EMC EN61000-6-2, EN61000-6-4 Class A limits				
CE / UKCA	IEC62368-1				
DNV	Pending				
ENVIRONMENTAL					
Operating Temperature	-45°C to +60°C [+70°C] /-49°F to +140°F [+158°F]				
Storage Temperature	-45°C to +80°C /-49°F to +176°F				
Ingress Protection	IP66 & IP67 to IEC60529, Type 6 Enclosure				
Salt Mist	IEC60068-2-52 & IEC60945 Section 8.12				
Vibration	0.7 g to IEC60068-2-6 & IEC60945				
Wind Loading	Operational to 130 km/h, survival to 268 km/h				
Humidity	5% to 95%				
MECHANICAL					
Material	Electro-polished 316L stainless steel				
Window	Optical: HD grade toughened glass, thermostatically operated demister [Wiper ^{*2}] Thermal: Germanium window with DLC (Diamond-Like Carbon) coating and impact guard				
Pan Turning Circle	Ø 630 mm / 24.80"				
Tilt Turning Circle	Ø 416 mm / 16.38"				
Mounting Orientation	Upright or inverted				
Mounting Base	4 x M8 tapped holes, equispaced on a 4" (101.6 mm) P.C.D.				
Dimensions ^{$*1$} (W x D x H)	412 x 310 x 338 mm / 16.22" x 12.21" x 13.31"				
Weight ^{*1}	18 kg / 39.7 lb				
Cable Gland Entries	1 x M20				
ELECTRICAL					
Power Requirements	24 V AC/DC (±10%) 50/60 Hz				
	11 VA Quiescent				
Power Consumption*1	72 VA Operating				
	80 VA Operating (with heater)				
VA/a ala Caratara I*1	100 VA Max				
Wash Control ^{*1}	24 V AC/DC (0.75 A max) switched output				
Auxiliary Inputs*3	1 x contact closure input (5 V pull up) [additional inputs available on request]				
Relay Outputs ^{*3} Audio ^{*3}	1 x volt free switched output (24 V 0.75 A max) [up to 2 available on request] [Line Input]				
		-			
CAMERA OPERATION		_			
Pan Operation	0° to 42°/sec, mechanical limits, programmable soft-stops, preset positioning 0° to 42°/sec, programmable soft-stops, preset positioning				
Tilt Operation	180° rotation, 0° to 21°/sec, mechanical limits, programmable soft stops, preset positioning				
Preset Memory	128 user programmable preset positions (pan, tilt, zoom, and focus), preset accuracy <0.05°, absolute positioning				
PTZ Features	Proportional pan & tilt control in relation to zoom depth, intelligent focus				
Wash/Wipe*1	[Optional wash/wipe with auto-wiper off]				
ONVIF Control Features	PTZ control (continuous, relative and absolute), focus control, preset store/recall, auxiliary controls (wash/wipe/auto focus), wash/wipe control mappable to ONVIF presets for control systems that have no support fo auxiliary commands, alarm inputs, and relay outputs	or			

DAY/NIGHT CAMERA / LENS				
Image Sensor	1/2.8" Progressive scan Exmor CMOS sensor			
Signal System	1080p 25/30/50/60 FPS			
Effective Pixels	Approximately 2.13 megapixels			
Zoom Range	30x zoom (up to 360x with digital zoom)			
Focal Length / Aperture	4.3 mm (wide) to 129 mm (tele), F1.6 to F4.7			
Angle of View (H)	Approx. 64.0° (Wide) to 2.4° (Tele)			
Minimum Illumination (50% IRE, High Sensitivity Mode ON)	0ICR-OFF mode: 0.009 lx (Shutter Speed: 1/30 s), 0.0012 lx (Shutter Speed: 1/4 s or 1/3 s) ICR-ON mode: 0.00008 lx (Shutter Speed: 1/30 s)			
Minimum Illumination (50% IRE, High Sensitivity Mode OFF)	ICR-OFF mode: 0.09 lx (Shutter Speed: 1/30 s), 0.012 lx (Shutter Speed: 1/4 s or 1/3 s) ICR-ON mode: 0.00063 lx (Shutter Speed: 1/30 s)			
Minimum Illumination (30% IRE, High Sensitivity Mode ON)	ICR ON mode: 0.000005 lx (Shutter Speed: 1/4 s or 1/3 s, 30%)			
Wide Dynamic Range	On/off			
Electronic Shutter	Auto 1/1 to 1/10,000 s, 22 steps			
Signal/Noise Ratio	> 50 db (weight on)			
Features	Digital zoom on/off, auto/manual focus, auto/manual iris, auto/manual IR cut filter remove (ICR), auto exposure (AE), automatic gain control (AGC), auto white balance (AWB), backlight compensation (BLC), auto slow shutter, wide dynamic range (WDR), defog, on-screen text display (OSD), image invert			
Image Stabilization	Super Image Stabilizer (Super/Super+)			

THERMAL IMAGER	T306	T318	T618	T636	
Image Sensor	Uncooled LWIR VOx microbolometer				
Pixel Pitch	12 µm				
Thermal Sensitivity	<50 mK at f/1.0				
Spectral Response	8- 14 µm				
Refresh Rate	>9Hz [>60Hz] [25 Hz / 30 Hz]				
Pixel Resolution ^{*6}	320 × 256		640 × 512		
Fixed Focal Length	6.3 mm f/1.0	18 mm f/1.0	18 mm f/1.0	36 mm f/1.0	
Angle of View	34.1° × 27.3°	12.7° × 9.7°	24.3° × 19.5°	12.2° x 9.8°	
Radiometric Functionality Available	Yes	No	Yes	No	
Features	8x digital zoom, auto/manual gain mode (AGC), auto/manual FFC(NUC), selectable color palettes, second generation digital detail enhancement (DDE), image optimization, active contrast enhancement (ACE), information based histogram equalization (IBHEQ)				
Advanced Radiometry	When used with Synergy, the advanced radiometry feature provides four regions of interest per preset position that can be individually monitored or compared against one another for temperature threshold changes.				
VIDEO ENCODING					
Compression Standards	H.264 (MPEG4 part 10/AVC) high, main, base profiles H.265 (MPEG-H part 2/HEVC), MJPEG				
Bitrate Mode		Constant Bitrate (CBR	R), Variable Bitrate (VBR)		
Encoding Capability	Simultaneous streaming of both day/night and thermal images Up to 2 independently configurable encoded video streams per image sensor				
Stream Bitrate ^{*4}	100 kb/s to 25 Mb/s				
Image Resolution ^{*4/6}	Day/Night Camera: Full HD 1080p (1920 x 1080), 720p (1280 x 720), D1 (720 x 576/480), 4CIF (704 x 576), CIF (352 x 288) Thermal Imager: Native (640x512 or 320x256), D1 (720 x 576/480), VGA (640 x 480), QVGA (320 x 240)				
Image Rate ^{*4}	Thermal (Full, half, quarter, sixth), HD (up to 60 IPS)				
GOP Structure	I-frame only, 5 to 240 frames				
Region of Interest (ROI)	Configurable per encoded video stream, ability to crop a selected area of the image source for encoding (variable resolution and aspect ratio)				
AUDIO ENCODING					
Compression Standards	ARM AACLC, ARM AACLC MPEG2, ARM AACHE, ARM AACHE V2				
Sample Rate	48 kHz, 44.1 kHz, 32 kHz, 16 kHz				
Stream Bitrate	12 to 384 kb/s (AACHE and AACHE V2 32 to 64 kb/s)				

NETWORK DEVICE		
Interface Options	Ethernet (100Base-T, 10-Base-T), Auto/full/half duplex, Auto/10/100, Configurable MTU Size	
Protocols	TCP/IP, UDP, ICMP, DHCP, DNS, HTTP, HTTPS, NTP, RTSP/RTCP, TSRTP, RTMP, RTMPS, SRT, IGMP, SNMP, SYNS, SSL, TLS, 802.1x (EAP)	
Control Protocol	SYNS, ONVIF (Profile S, T compliant)	
Video Stream Delivery	RTSP/RTP (Unicast: UDP/TCP, Multicast UDP), TSRTP, RTMP, RTMPS, SRT	
Network Discovery	SYNS, WS-Discovery (ONVIF)	
Device Security	Multiple users and 7 access levels protecting access to the web interface, ONVIF and RTSP services, HTTPS support, HTTP disable, 802.1x (EAP), video streaming disabled until change of default password, unicast stream disable	
Supported Internet Browsers	Chrome/Firefox/IE/Edge (No Active-X browser components required)	
System Maintenance	Field upgradeable firmware, diagnostic logs Hardware system supervisor providing temperature management, cold-start, auto-shutdown and watchdog control	

NOTE: *1 Dependent on certification and equipment fitted. *2 Wipers are consumable items that need regular replacement. Please refer to the manual for recommendations and maintenance. *3 Dependent on cable tail option. *4 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream. *5 Exact certification requirements must be specified at the time of order. *6 Dependent on lens selection.

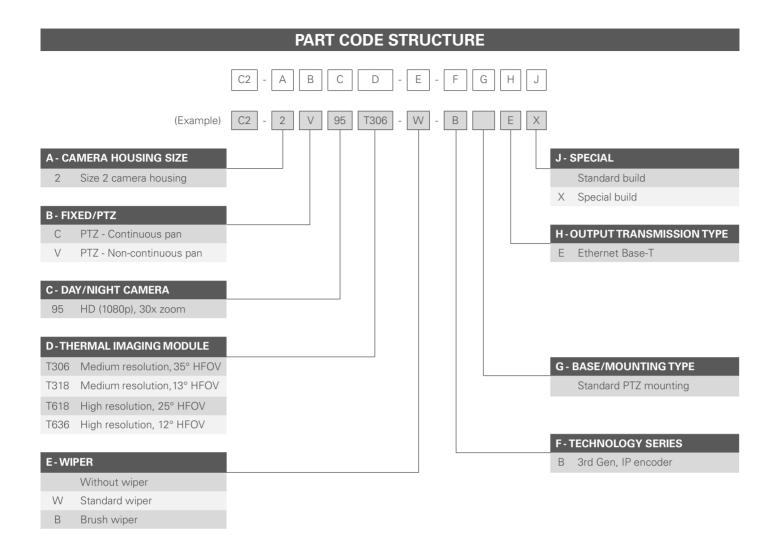



Reference Numbers: 06\DS 0742 lss 3

Synectics synecticsglobal.com

Specifications subject to change. E & OE. Copyright © Synectic Systems Group Limited 2023. All Rights Reserved.